

Day-Brite


IES INDOOR REPORT
PHOTOMETRIC FILENAME : 29981.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] 29981
[TESTDATE] 11/09/2011
[LUMCAT] 2STG24L840-2-WO
[LUMINAIRE] PHILIPS DAY-BRITE 2X2 SOFTRACE LED
[MORE] W/ LOUVERED DOOR
[LAMP] 30WLED
[BALLAST] LED DRIVER
[MANUFAC] PHILIPS DAY-BRITE
[TESTLAB] PHILIPS DAY-BRITE PHOTOMETRIC LABORATORY, TUPELO, MS
[MORE] NVLAP LABORATORY CODE 200016-0
[ISSUE DATE] 11/10/2011
[_TEST_LEVEL]
[_TIFF_FILE_NAME]
[_VERSION] fo2ies 3.0e (2011-02)(90)
[_LM79] Absolute Photometry tested in accordance with IES procedure LM79-08
[_TEST_DISTANCE] 30 ft.
[_SHIELDING_ANGLE] Normal 90, Parallel 90
[OTHER] TOTAL LUMEN OUTPUT = 2269 LUMENS

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	2269
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	76
Total Luminaire Watts	30
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.16
Spacing Criterion (90-270)	1.34
Spacing Criterion (Diagonal)	1.32
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	1.88 ft
Luminous Width (90-270)	1.86 ft
Luminous Height	0.00 ft

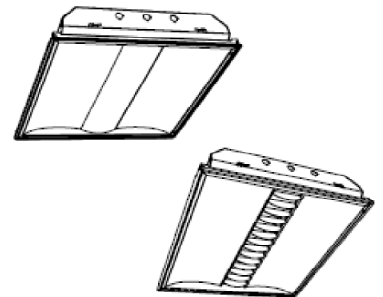

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 29981.IES

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	2027	2332	2775
55	1759	2081	2601
65	1470	1783	2256
75	1188	1426	1723
85	812	882	918

**IES INDOOR REPORT
PHOTOMETRIC FILENAME : 29981.IES**

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>
0.0	880	880	880	880	880
2.5	881	878	877	878	881
5.0	874	872	872	874	879
7.5	864	862	864	869	876
10.0	851	849	854	862	871
12.5	835	834	843	854	866
15.0	819	818	829	844	858
17.5	799	799	814	832	848
20.0	778	781	797	819	839
22.5	754	760	779	805	828
25.0	728	733	759	790	814
27.5	700	708	735	772	801
30.0	671	682	711	753	784
32.5	641	652	687	732	766
35.0	610	624	662	710	747
37.5	577	592	635	685	723
40.0	542	555	603	659	697
42.5	502	523	566	630	671
45.0	466	488	536	595	638
47.5	432	451	504	563	604
50.0	397	417	467	524	567
52.5	361	382	430	487	527
55.0	328	343	388	447	485
57.5	293	312	353	406	443
60.0	261	278	317	367	398
62.5	230	245	280	324	355
65.0	202	215	245	280	310
67.5	176	187	210	243	265
70.0	151	158	179	207	228
72.5	123	133	149	168	187
75.0	100	107	120	132	145
77.5	79	84	92	97	104
80.0	58	63	66	70	72
82.5	39	42	41	44	43
85.0	23	23	25	26	26
87.5	13	14	13	14	13
90.0	9	10	9	10	9

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 29981.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	317.59	N.A.	14.00
0-30	669.19	N.A.	29.50
0-40	1086.64	N.A.	47.90
0-60	1860.32	N.A.	82.00
0-80	2236.69	N.A.	98.60
0-90	2268.77	N.A.	100.00
10-90	2185.92	N.A.	96.30
20-40	769.05	N.A.	33.90
20-50	1187.55	N.A.	52.30
40-70	1021.59	N.A.	45.00
60-80	376.38	N.A.	16.60
70-80	128.46	N.A.	5.70
80-90	32.08	N.A.	1.40
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	2268.77	N.A.	100.00

Total Luminaire Efficiency = N.A.%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	82.85
10-20	234.74
20-30	351.60
30-40	417.45
40-50	418.50
50-60	355.18
60-70	247.92
70-80	128.46
80-90	32.08
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : 29981.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	105	101	97	107	102	99	95	98	95	92	94	92	90	91	89	87	85
2	100	92	85	80	97	90	84	79	86	81	77	83	79	75	80	77	74	71
3	91	81	73	67	89	79	72	66	76	70	65	74	68	64	71	67	63	61
4	84	72	63	57	81	71	63	57	68	61	56	66	60	55	64	59	54	52
5	77	64	56	49	75	63	55	49	61	54	48	59	53	48	57	52	47	45
6	71	58	49	43	69	57	49	43	55	48	43	54	47	42	52	46	42	40
7	66	53	44	38	64	52	44	38	50	43	38	49	42	37	48	42	37	35
8	62	48	40	34	60	48	40	34	46	39	34	45	38	34	44	38	33	32
9	58	44	36	31	56	44	36	31	43	36	31	42	35	30	41	35	30	28
10	54	41	33	28	53	40	33	28	39	33	28	39	32	28	38	32	28	26

POLAR GRAPH

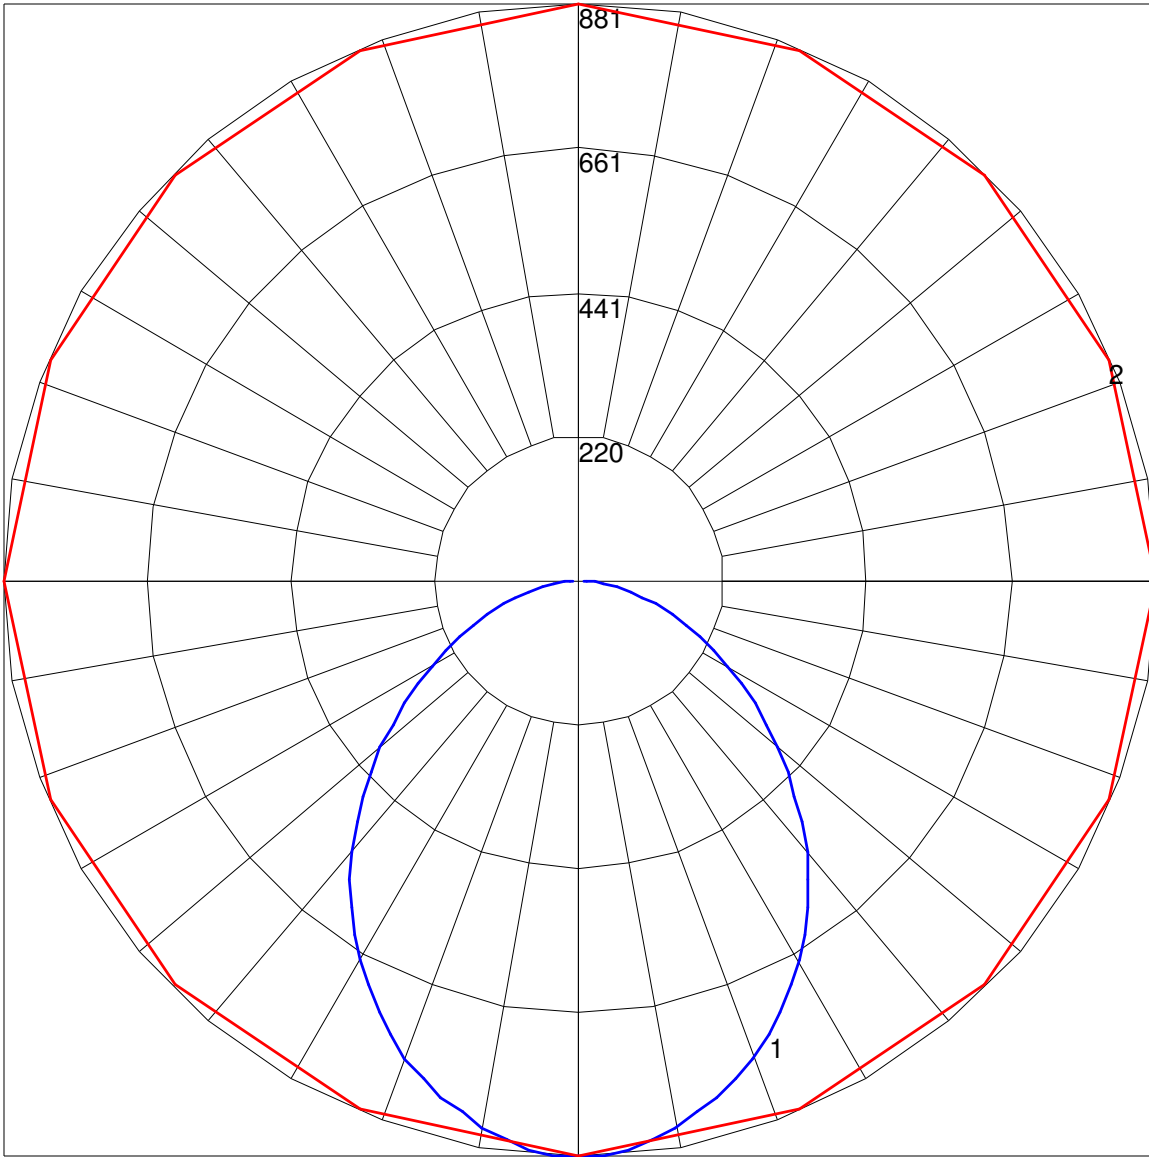

Maximum Candela = 881 Located At Horizontal Angle = 0, Vertical Angle = 2.5
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (2.5) (Through Max. Cd.)